



Part No. ALL18990-19116

Flush Head Self-Ejecting Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
5/16"	.400"	Steel	ALL18990	ALL18992	ALL18991	ALL18993
5/16"	.450"	Steel	ALL18996	ALL18998	-	-
5/16"	.500"	Aluminum	ALL18997	ALL18999	ALL19004	ALL19005
5/16"	.500"	Steel	ALL19000	ALL19002	ALL19001	ALL19003
5/16"	.550"	Steel	ALL19006	ALL19008	-	-
5/16"	.650"	Steel	ALL19010	ALL19012	-	-
7/16"	.500"	Aluminum	ALL19113	ALL19114	ALL19115	ALL19116
7/16"	.500"	Steel	ALL19100	ALL19102	-	-
7/16"	.550"	Steel	ALL19110	ALL19112	ALL19101	ALL19103
7/16"	.500"	Steel	-	-	ALL19098	ALL19099


Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. $A=B+C$

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

		Fastener Length "A"				
		.400"	.450"	.500"	.550"	.600"
Spring Length "B"	1" Springs					
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"
	1-3/8" Springs					
	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"
.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

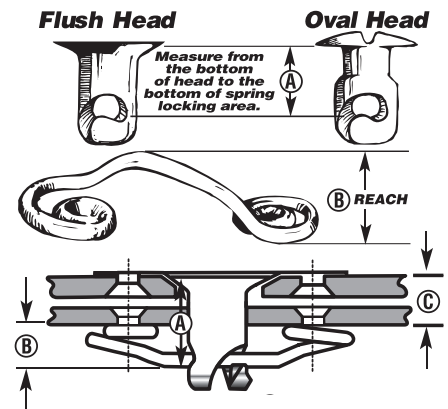

REV120221

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com