Part No. **ALL19128-19139**

Flush Head Self-Ejecting Allen Fasteners

			Silver		Black	
Body Size	Length	Material	10 Pack	50 Pack	10 Pack	50 Pack
5/16"	.500"	Aluminum	-	-	ALL19128	ALL19129
5/16"	.500"	Steel	ALL19130	ALL19131	-	-
5/16"	.550"	Steel	ALL19132	ALL19133	-	-
7/16"	.500"	Aluminum	-	-	ALL19134	ALL19135
7/16"	.500"	Steel	ALL19136	ALL19137	-	-
7/16"	.550"	Steel	ALL19138	ALL19139	-	-

Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. A=B+C

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

Spring Length "B"	Fastener Length "A"				
	.400"	.450"	.500"	.550"	.600"
1" Springs	Total Material Thickness "C"				
.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315-.350"	.365"-.400"
.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"
1-3/8" Springs					
.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"
.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"

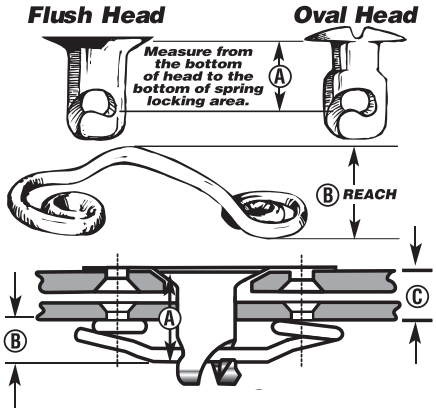

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com