



Part No. ALL19186-19275

Quick Turn Flush Head Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
5/16"	.500"	Aluminum	ALL19256	ALL19258	ALL19257	ALL19259
5/16"	.500"	Steel	ALL19186	ALL19188	-	-
7/16"	.400"	Aluminum	ALL19260	ALL19262	ALL19261	ALL19263
7/16"	.400"	Steel	ALL19190	ALL19192	-	-
7/16"	.500"	Aluminum	ALL19266	ALL19268	ALL19267	ALL19269
7/16"	.500"	Steel	ALL19200	ALL19202	-	-
7/16"	.550"	Aluminum	ALL19270	ALL19272	ALL19271	ALL19273
7/16"	.550"	Steel	ALL19210	ALL19212	-	-


Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. $A=B+C$

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

Spring Length "B"	1" Springs	Fastener Length "A"				
		.400"	.450"	.500"	.550"	.600"
		Total Material Thickness "C"				
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"
	1-3/8" Springs					
	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"

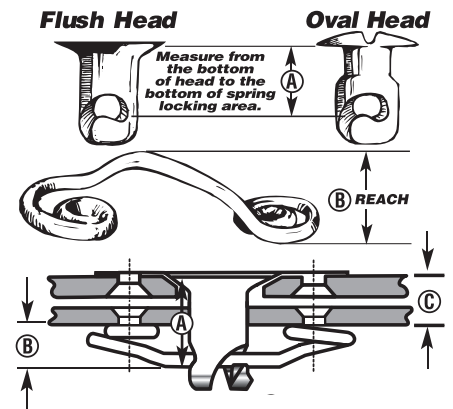

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com