



Part No. ALL19211-ALL19295

## Quick Turn Oval Head Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
1/4"*	.400"	Steel	ALL19211	ALL19213	ALL19224	ALL19225
5/16"	.500"	Aluminum	ALL19276	ALL19278	ALL19277	ALL19279
5/16"	.500"	Steel	ALL19214	ALL19215	ALL19226	ALL19227
7/16"	.400"	Aluminum	ALL19280	ALL19282	ALL19281	ALL19283
7/16"	.400"	Steel	ALL19216	ALL19218	-	-
7/16"	.500"	Aluminum	ALL19286	ALL19288	ALL19284	ALL19285
7/16"	.500"	Steel	ALL19220	ALL19222	ALL19228	ALL19229
7/16"	.550"	Aluminum	ALL19290	ALL19292	ALL19291	ALL19293
7/16"	.550"	Steel	ALL19230	ALL19232	ALL19231	ALL19233
7/16"	.600"	Aluminum	-	-	ALL19294	ALL19295
7/16"	.750"	Aluminum	ALL19274	ALL19275	-	-

\*Use .062" Daimeter springs ALL19296 or ALL19298


### Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable].  $A=B+C$

### Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

		Fastener Length "A"					
		.400"	.450"	.500"	.550"	.600"	
Spring Length "B"	1" Springs	Total Material Thickness "C"					
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"	
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"	
	1-3/8" Springs	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"	
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

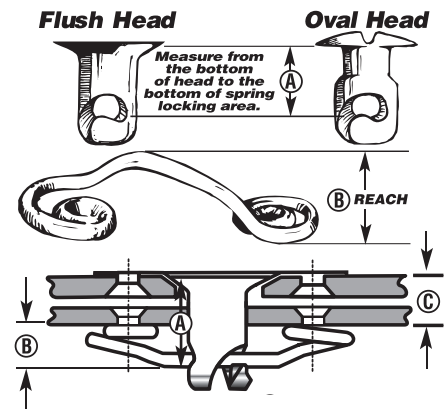

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098  
 Phone: (269) 463-8000 Fax: (800) 772-2618 [www.allstarperformance.com](http://www.allstarperformance.com)

REV031421