



Part No. ALL19236-19252

Quick Turn Winged Head Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
7/16"	.400"	Steel	ALL19236	ALL19238	-	-
7/16"	.500"	Steel	ALL19240	ALL19242	ALL19241	ALL19243
7/16"	.550"	Steel	ALL19250	ALL19252	-	-


Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. $A=B+C$

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

Spring Length "B"		Fastener Length "A"				
		.400"	.450"	.500"	.550"	.600"
1" Springs		Total Material Thickness "C"				
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"
1-3/8" Springs	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"

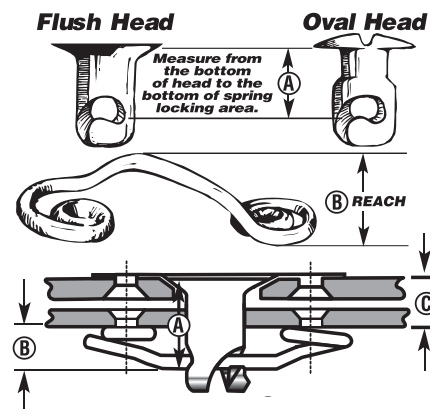

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com