



Part No. ALL19406-19408

Quick Turn Spring Fixture

Accurately drill panels when installing quick turn fastener springs. Start with a 1/4" center hole and use the fixture to locate and drill 1/8" holes for mounting the springs. Size listed is spring center to center distance.

Part No.	Description
ALL19406.....	Fixture For 3/4" Spring
ALL19407.....	Fixture For 1" Spring
ALL19408.....	Fixture For 1-3/8" Spring




ALL19406




ALL19407



ALL19408

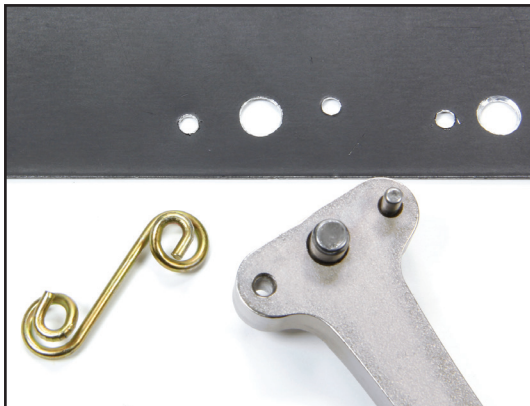

		Fastener Length "A"					
		.400"	.450"	.500"	.550"	.600"	
Spring Length "B"	1" Springs		Total Material Thickness "C"				
	.250"		.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"
	.325"		.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"
	1-3/8" Springs						
	.325"		.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"		.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"
.425"		.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

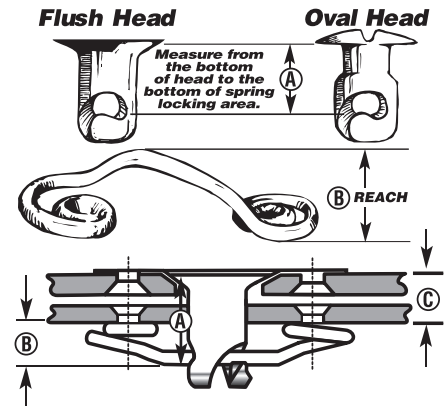

REV040720

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com