



Part No. **ALL64300**
 ALL64302


Suspension Limiter

Single bushing suspension limiter is commonly used on the chassis LR or RR to limit travel during acceleration "hike up" and control roll steer. Dual bushing limiter is often used on the lift bar to control lift bar travel on deceleration. Bushing design reduces or absorbs shock when suspension is limited and helps reduce tire unloading. Top plate is drilled to attach a 1/2" rod end when used in a shock mount or for attaching to a weight jack bolt with 7/16"-20 internal threads using optional chrome moly stud ALL64304. Clevis has a 3/8" hole for simple attachment to a chain or cable.

Part No. Description

ALL64300.....Single Bushing Limiter

ALL64302.....Dual Bushing Limiter

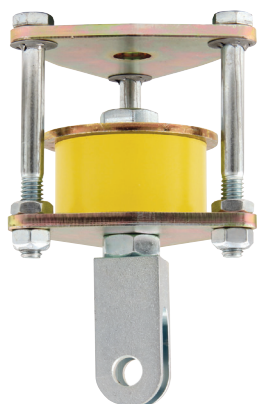

ALL64300



ALL64302



ALL64304



ALL64305


Replacement Parts:

ALL64304.....Chrome Moly Stud With Jam Nut (7/16"-20)

ALL64305.....Clevis 3/8" (1/2"-20)



Shown with
ALL58008 Rod End
(Sold Separately)

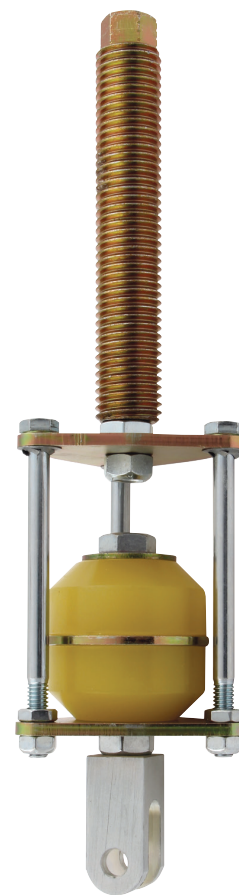

Shown with
ALL56094 Jack Bolt
(Sold Separately)

REV052820

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com