



Part No. ALL19046-19070

## Winged Head Self-Ejecting Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
5/16"	.450"	Steel	ALL19046	ALL19048	-	-
5/16"	.500"	Steel	ALL19050	ALL19052	-	-
5/16"	.550"	Steel	ALL19056	ALL19058	-	-
5/16"	.650"	Steel	ALL19060	ALL19062	-	-
7/16"	.500"	Steel	ALL19064	ALL19066	-	-
7/16"	.650"	Steel	ALL19068	ALL19070	-	-


### Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable].  $A=B+C$

### Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

		Fastener Length "A"					
		.400"	.450"	.500"	.550"	.600"	
Spring Length "B"	1" Springs	Total Material Thickness "C"					
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"	
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"	
	1-3/8" Springs	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"	
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

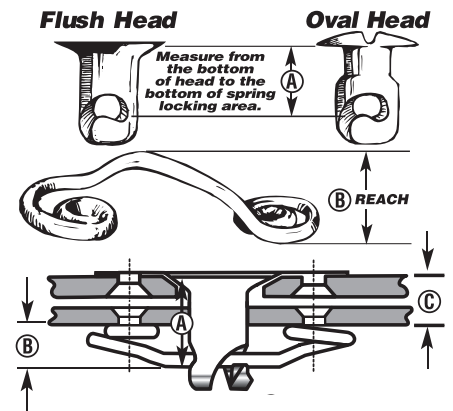

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098  
 Phone: (269) 463-8000 Fax: (800) 772-2618 [www.allstarperformance.com](http://www.allstarperformance.com)