



Part No. ALL19071-19078

Oval Head Aluminum Torx Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
7/16"	.500"	Aluminum	ALL19071	ALL19072	ALL19073	ALL19074
7/16"	.550"	Aluminum	ALL19075	ALL19076	ALL19077	ALL19078


Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. $A=B+C$

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

		Fastener Length "A"					
		.400"	.450"	.500"	.550"	.600"	
Spring Length "B"	1" Springs	Total Material Thickness "C"					
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"	
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"	
	1-3/8" Springs	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"	
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

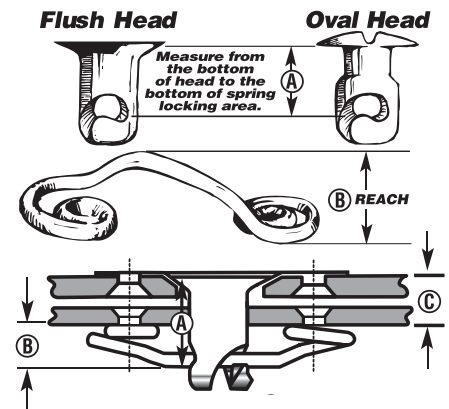

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com