



Part No. ALL19152-19177

Oval Head Allen Fasteners



Body Size	Length	Material	Silver		Black	
			10 Pack	50 Pack	10 Pack	50 Pack
5/16"	.500"	Steel	ALL19152	ALL19153	-	-
5/16"	.550"	Steel	ALL19154	ALL19155	-	-
7/16"	.500"	Aluminum	ALL19172	ALL19173	ALL19176	ALL19177
7/16"	.500"	Steel	ALL19162	ALL19163	-	-
7/16"	.550"	Steel	ALL19164	ALL19165	-	-


Quick Turn Fastener Measurement Guidelines

To find [A] Fastener Length, add together [B] Spring Reach and [C] Material Thickness [including bracket if applicable]. $A=B+C$

Quick Turn Fastener Selection

- Determine the total thickness of the panels being joined including mounting brackets and the space between the panels, if any.
- Select the proper body length and spring height combination which provides the proper thickness range.

		Fastener Length "A"					
		.400"	.450"	.500"	.550"	.600"	
Spring Length "B"	1" Springs	Total Material Thickness "C"					
	.250"	.165"-.200"	.215"-.250"	.265"-.300"	.315"-.350"	.365"-.400"	
	.325"	.098"-.133"	.148"-.183"	.198"-.233"	.248"-.283"	.348"-.383"	
	1-3/8" Springs	.325"	.105"-.148"	.155"-.198"	.205"-.248"	.255"-.298"	.355"-.398"
	.375"	.055"-.098"	.105"-.148"	.155"-.198"	.205"-.248"	.305"-.348"	
	.425"	.005"-.048"	.055"-.098"	.105"-.148"	.155"-.198"	.255"-.298"	

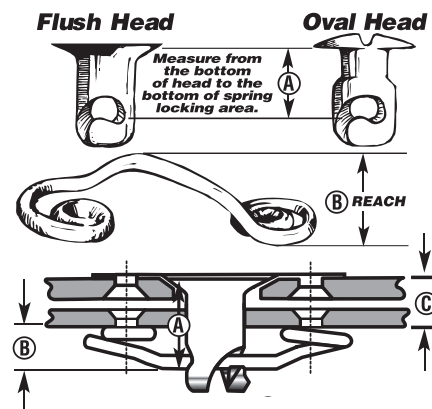

REV120621

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com